

Digital Door Lock

M113K-PK/ M1102-PK


K E E S

Feature

- Fingerprint Recognition
- Push-pull handle
- Pin Access
- RFID
- Voice Guide
- Auto-locking
- BLE App Control(option)

Dimensions

Unit : mm

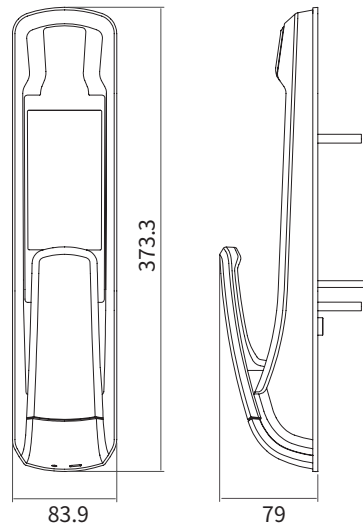

Specifications

	M113K	M1102
Handle Type	Push Pull	
Unlocking Methods	IRIS Recognition	N/A
	Finger Print Recognition	N/A
	RFID Card	2ea (Available Mifare type Max. 50ea)
	Password	4~13 digit number
Mechanical Cylinder Key	2EA	N/A
Door Thickness	40 ~ 50 mm (option : 60 ~ 100 mm)	
Back Set / Space	70.5mm/44mm	
Power	DC 6V (1.5V AA Alkaline batteries x 4ea or 8 ea)	
Battery Life (Approximated Average - 10 times per day)	12 months(manual w/up & w/o network) ~ 10 months(Automatic Wake up & Using RF, Network options)	
Emergency Battery	Micro USB / DC5V	
Material	Al die casting &ABS mold	
Weight(kg)	4.5	
Dimension (WxHxD)	Outer:W x H x D(mm)	83.9 X 373.3 X 79
	Inner: W x H x D(mm)	84.1 X 374.2 X 80
	Strike Box W x H x Strike D(mm)	21 x 106 x 19.5
	Mortise Front W x H x Depth D(mm)	25 x 110 x 106
Optional	BLE, RF	



Durable And Reliable



Highly Resistant Metal Body



Auto Lock/Re-Lock/Lock Out



Trace Prevention Password Protection



Multi-Level Volume Control/ Selective Mute function



Emergency Power Function



One Point PushPull(PullPush) Handle Switching Design



The door lock has been designed to prevent from wrong insertion of batteries



High Voltage Prevention System



Fire Prevention System